



### **The PROCTER PGFC 1700 Ornamental Mild Steel Bollards**

*The PGFC 1700 is an attractive and functional ornamental bollard. The body of the bollard is manufactured from mild steel, galvanised for longevity. A slightly domed cap and two rings of high grade, impact resistant malleable cast iron are welded onto the steel body to complete the design.*

*The bollards are available in a galvanised and galvanised and coated finish. RAL numbers must be specified at time of order.*

*Eyelets, hooks and chains can be added to these bollards to complete the decorative effect. Please ask for more information*

### **Product Range**

<b>Order Code</b>	<b>Description</b>	<b>Weight</b>
138 120 251	Ragged	15.4kg
138 120 252	Ragged (Coated Black)	15.4kg
138 120 253	Ragged (Coated; Please specify BS/RAL colour)	15.4kg
138 120 254	Flanged	11.7kg
138 120 255	Flanged (Coated Black)	11.7kg
138 120 256	Flanged (Coated; Please specify BS/RAL colour)	11.7kg

### **Product details**

1000mm above ground  
400mm below ground  
114mm diameter tube  
3mm wall thickness

### **Installation & use**

Flanged bollards require bolting down to a suitable concrete surface (no less than 300mm cube) by means of three M12 bolts.

Ragged bollards require a hole of at least 400mm deep for casting into concrete.

Ragged bollards are supplied with welded fixing spikes to ensure firm ground anchorage.

This product is guaranteed for 12 months (if installed and used correctly).

**Tel Sales : 02920 855756 - Fax : 02920 887005 - Email : Enquiries@procterContracts.co.uk**

Procter Contracts - North  
Isabella Road  
Leeds  
LS25 2DY

Procter Contracts - South West  
11 Pantglas Industrial Estate  
Bedwas  
CF83 8XD

Procter Contracts -South East  
Codham Hall  
Brentwood  
CM13 3JT



### **The PROCTER PGFC 1700 Ornamental Mild Steel Bollards**

*The PGFC 1700 is an attractive and functional ornamental bollard. The body of the bollard is manufactured from mild steel, galvanised for longevity. A slightly domed cap and two rings of high grade, impact resistant malleable cast iron are welded onto the steel body to complete the design.*

*The bollards are available in a galvanised and galvanised and coated finish. RAL numbers must be specified at time of order.*

*Eyelets, hooks and chains can be added to these bollards to complete the decorative effect. Please ask for more information*

### **Product Range**

<b>Order Code</b>	<b>Description</b>	<b>Lift Out Weight</b>	<b>Weight</b>
138 120 257	Removable	15.0kg	19.7kg
138 120 259	Removable (Coated Black)	15.0kg	19.7kg
138 120 258	Removable (Coated; Please specify BS/RAL colour)	15.0kg	19.7kg
<b>Installation Parts</b>			
138 120 260	Removable (body only)		15.0kg
138 120 261	Removable (Coated Black) (body only)		15.0kg
138 120 262	Removable (Coated; specify BS/RAL colour) (body only)		15.0kg

### **Product details**

1000mm above ground  
400mm below ground  
114mm diameter tube  
3mm wall thickness

### **Installation & use**

Removable bollards require an excavated hole of at least 300mm square and 400mm deep for the socket.  
This product is guaranteed for 12 months (if installed and used correctly).

**Tel Sales : 02920 855756 - Fax : 02920 887005 - Email : Enquiries@procterContracts.co.uk**

Procter Contracts - North  
Isabella Road  
Leeds  
LS25 2DY

Procter Contracts - South West  
11 Pantglas Industrial Estate  
Bedwas  
CF83 8XD

Procter Contracts -South East  
Codham Hall  
Brentwood  
CM13 3JT



### **The PROCTER PGFC 2000s Ornamental Mild Steel Bollards**

*Functional yet striking, the PGFC 2000s bollard is manufactured from mild steel and galvanised for longevity. A spherical, impact resistant, malleable cast iron cap is welded on to the bollard complete the design. This bollard is ideal for providing an aesthetic solution to unauthorised parking and access.*

*The PGFC 2000s is available in a galvanised and galvanised and coated finish. RAL numbers must be specified at time of order.*

*Eyelets, hooks and chains can be added to these bollards to complete the decorative effect. Please ask for more information.*

### **Product Range**

<b>Order Code</b>	<b>Description</b>	<b>Weight</b>
138 120 111	Ragged	8.4kg
138 120 112	Ragged (Coated Black)	8.4kg
138 120 113	Ragged (Coated; Please specify BS/RAL colour)	8.4kg
138 120 114	Flanged	7.1kg
138 120 115	Flanged (Coated Black)	7.1kg
138 120 116	Flanged (Coated; Please specify BS/RAL colour)	7.1kg

### **Product details**

1000mm above ground  
400mm below ground  
76mm diameter tube  
3mm wall thickness

### **Installation & use**


Flanged bollards require bolting down to a suitable concrete surface (no less then 300mm cube) by means of three M12 bolts.  
Ragged bollards require a hole of at least 400mm deep for casting into concrete.  
Ragged bollards are supplied with welded fixing spikes to ensure firm ground anchorage.  
This product is guaranteed for 12 months (if installed and used correctly).

**Tel Sales : 02920 855756 - Fax : 02920 887005 - Email : [Enquiries@procterContracts.co.uk](mailto:Enquiries@procterContracts.co.uk)**

Procter Contracts - North  
Isabella Road  
Leeds  
LS25 2DY

Procter Contracts - South West  
11 Pantglas Industrial Estate  
Bedwas  
CF83 8XD

Procter Contracts -South East  
Codham Hall  
Brentwood  
CM13 3JT

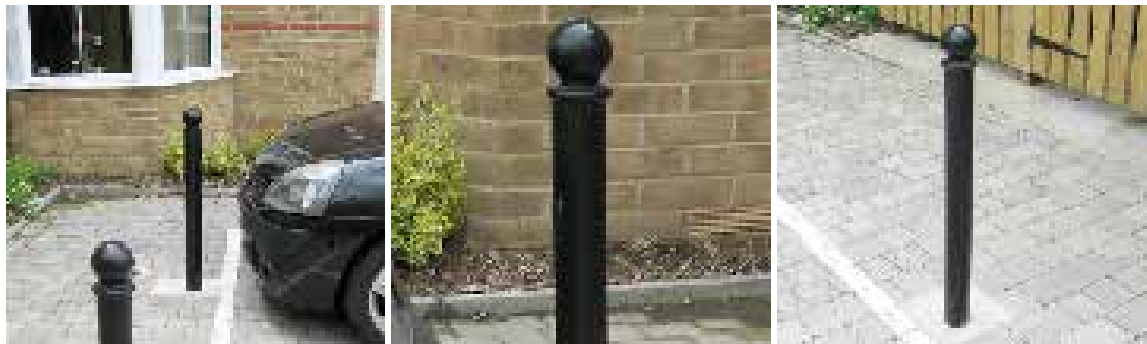

### **The PROCTER PGFC 2000s Ornamental Mild Steel Bollards**

*Functional yet striking, the PGFC 2000s bollard is manufactured from mild steel and galvanised for longevity. A spherical, impact resistant, malleable cast iron cap is welded on to the bollard complete the design. This bollard is ideal for providing an aesthetic solution to unauthorised parking and access.*

*The PGFC 2000s is available in a galvanised and galvanised and coated finish. RAL numbers must be specified at time of order.*

*Eyelets, hooks and chains can be added to these bollards to complete the decorative effect. Please ask for more information.*

### **Product Range**

<b>Order Code</b>	<b>Description</b>	<b>Lift out weight</b>	<b>Weight</b>
138 120 117	Removable	7.6kg	12.3kg
138 120 119	Removable (Coated Black)	7.6kg	12.3kg
138 120 118	Removable (Coated; Please specify BS/RAL colour)	7.6kg	12.3kg
	<b>Installation Parts</b>		7.6kg
138 120 120	Removable (body only)		7.6kg
138 120 121	Removable (Coated Black) (body only)		7.6kg
138 120 122	Removable (Coated; specify BS/RAL colour) (body only)		

### **Product details**

1000mm above ground  
400mm below ground  
76mm diameter tube  
3mm wall thickness

### **Installation & use**

Removable bollards require an excavated hole of at least 300mm square and 400mm deep for the socket.  
This product is guaranteed for 12 months (if installed and used correctly).

**Tel Sales : 02920 855756 - Fax : 02920 887005 - Email : [Enquiries@procterContracts.co.uk](mailto:Enquiries@procterContracts.co.uk)**

Procter Contracts - North  
Isabella Road  
Leeds  
LS25 2DY

Procter Contracts - South West  
11 Pantglas Industrial Estate  
Bedwas  
CF83 8XD

Procter Contracts -South East  
Codham Hall  
Brentwood  
CM13 3JT



### **The PROCTER PGFC 3000 Ornamental Mild Steel Bollards**

*With a practical and classic appearance the PGFC3000 Ornamental Mild Steel Bollard is suitable for various locations and purposes. The bollard comes with a removable option, allowing it to be taken from the shallow base and set aside when not in use, or locked into place when required.*

*The main post is constructed using mild steel, galvanised to ensure its longevity. Caps and rings manufactured from impact resistant malleable cast iron are welded on to the steel body to complete the design.*

*The bollards are available in a galvanised and a galvanised and coated finish. RAL numbers must be specified at time of order.*

*Eyelets, hooks and chains can be added to these bollards to complete the decorative effect. Please ask for more information.*

### **Product Range**

<b>Order Code</b>	<b>Description</b>	<b>Weight</b>
<b>1380120 061</b>	Ragged	13.5kg
<b>1380120 062</b>	Ragged (Coated Black)	13.5kg
<b>1380120 063</b>	Ragged (Coated; Please specify BS/RAL colour)	13.5kg
<b>1380120 064</b>	Flanged	11kg
<b>1380120 065</b>	Flanged (Coated Black)	11kg
<b>1380120 066</b>	Flanged (Coated; Please specify BS/RAL colour)	11kg

### **Product details**

900mm above ground  
500mm below ground  
114mm diameter tube  
3mm wall thickness

### **Installation & use**

Flanged bollards require bolting down to a suitable concrete surface (no less than 300mm cube) by means of three M12 bolts.

Ragged bollards require a hole of at least 500mm deep for casting into concrete.

Ragged bollards are supplied with welded fixing spikes to ensure firm ground anchorage.

This product is guaranteed for 12 months (if installed and used correctly).

**Tel Sales : 02920 855756 - Fax : 02920 887005 - Email : [Enquiries@procterContracts.co.uk](mailto:Enquiries@procterContracts.co.uk)**

Procter Contracts - North  
Isabella Road  
Leeds  
LS25 2DY

Procter Contracts - South West  
11 Pantglas Industrial Estate  
Bedwas  
CF83 8XD

Procter Contracts -South East  
Codham Hall  
Brentwood  
CM13 3JT





### **The PROCTER PGFC 3000 Ornamental Mild Steel Bollards**

*With a practical and classic appearance the PGFC3000 Ornamental Mild Steel Bollard is suitable for various locations and purposes. The bollard comes with a removable option, allowing it to be taken from the shallow base and set aside when not in use, or locked into place when required.*

*The main post is constructed using mild steel, galvanised to ensure its longevity. Caps and rings manufactured from impact resistant malleable cast iron are welded on to the steel body to complete the design.*

*The bollards are available in a galvanised and a galvanised and coated finish. RAL numbers must be specified at time of order.*

*Eyelets, hooks and chains can be added to these bollards to complete the decorative effect. Please ask for more information.*

### **Product Range**

<b>Order Code</b>	<b>Description</b>	<b>Lift out weight</b>	<b>Weight</b>
<b>1380120 067</b>	Removable	13.2kg	17.9kg
<b>1380120 068</b>	Removable (Coated Black)	13.2kg	17.9kg
<b>1380120 069</b>	Removable (Coated; Please specify BS/RAL colour)	13.2kg	17.9kg
	<b>Installation Parts</b>		13.2kg
<b>1380120 070</b>	Removable (body only)		13.2kg
<b>1380120 071</b>	Removable (Coated Black) (body only)		13.2kg
<b>1380120 072</b>	Removable (Coated; specify BS/RAL colour) (body only)		

### **Product details**

900mm above ground  
500mm below ground  
114mm diameter tube  
3mm wall thickness

### **Installation & use**

Removable bollards require an excavated hole of at least 300mm square and 500mm deep for the socket.  
This product is guaranteed for 12 months (if installed and used correctly).

**Tel Sales : 02920 855756 - Fax : 02920 887005 - Email : Enquiries@procterContracts.co.uk**

Procter Contracts - North  
Isabella Road  
Leeds  
LS25 2DY

Procter Contracts - South West  
11 Pantglas Industrial Estate  
Bedwas  
CF83 8XD

Procter Contracts -South East  
Codham Hall  
Brentwood  
CM13 3JT



### **The PROCTER PGFC 3500 (Morpeth) Ornamental Mild Steel Bollards**

*Elegant but functional in its design the PGFC3500 (Morpeth) Ornamental Mild Steel Bollard is constructed using mild steel, galvanised to ensure its longevity. Caps and rings manufactured from impact resistant malleable cast iron are welded on to the steel body to complete the design.*

*The bollards are available in a galvanised and a galvanised and coated finish. RAL numbers must be specified at time of order.*

*The bollard comes with a removable option, allowing it to be taken from the shallow base and set aside when not in use, or locked into place when required.*

*Eyelets, hooks and chains can be added to these bollards to complete the decorative effect. Please ask for more information.*

### **Product Range**

<b>Order Code</b>	<b>Description</b>	<b>Lift out weight</b>	<b>Weight</b>
138 120 307	Removable	13.7kg	18.4kg
138 120 308	Removable (Coated Black)	13.7kg	18.4kg
138 120 309	Removable (Coated; Please specify BS/RAL colour)	13.7kg	18.4kg
	<b>Installation Parts</b>		13.7kg
138 120 310	Removable (body only)		13.7kg
138 120 311	Removable (Coated Black) (body only)		13.7kg
138 120 312	Removable (Coated; specify BS/RAL colour) (body only)		

### **Product details**

900mm above ground  
400mm below ground  
114mm diameter tube  
3mm wall thickness

### **Installation & use**

Removable bollards require an excavated hole of at least 300mm square and 400mm deep for the socket.  
This product is guaranteed for 12 months (if installed and used correctly).

**Tel Sales : 02920 855756 - Fax : 02920 887005 - Email : enquiries@proctercontracts.co.uk**

Procter Contracts - North  
Isabella Road  
Leeds  
LS25 2DY

Procter Contracts - South West  
11 Pantglas Industrial Estate  
Bedwas  
CF83 8XD

Procter Contracts -South East  
Codham Hall  
Brentwood  
CM13 3JT



### **The PROCTER PGFC 4000 Ornamental Mild Steel Bollards**

*A functional bollard, elegant in design; the PGFC 4000 Ornamental Mild Steel Bollard is constructed using mild steel, galvanised to ensure its longevity. Caps and rings manufactured from impact resistant malleable cast iron are welded on to the steel body to complete the design.*

*The bollards are available in a galvanised and a galvanised and coated finish. RAL numbers must be specified at time of order.*

*Supplied ragged as standard, flanged and removable versions are also available. Eyelets, hooks and chains can be added to these bollards to complete the decorative effect. Please ask for more information.*

### **Product Range**

<b>Order Code</b>	<b>Description</b>	<b>Weight</b>
138 120 071	Ragged	13.2kg
138 120 072	Ragged (Coated Black)	13.2kg
138 120 073	Ragged (Coated; Please specify BS/RAL colour)	13.2kg
138 120 074	Flanged	10.4kg
138 120 075	Flanged (Coated Black)	10.4kg
138 120 076	Flanged (Coated; Please specify BS/RAL colour)	10.4kg

### **Product details**


900mm above ground  
500mm below ground (ragged only)  
114mm diameter tube  
3mm wall thickness

### **Installation & use**

Flanged bollards require bolting down to a suitable concrete surface (no less than 300mm cube) by means of three M12 bolts.  
Ragged bollards require a hole of at least 500mm deep for casting into concrete & are supplied with welded fixing spikes to ensure firm ground anchorage.  
To prevent against vehicle access, PROCTER recommends the distance between bollards does not exceed 1200mm.  
This product is guaranteed for 12 months (if installed and used correctly).

**Tel Sales : 02920 855756 - Fax : 02920 887005 - Email : [Enquiries@procterContracts.co.uk](mailto:Enquiries@procterContracts.co.uk)**



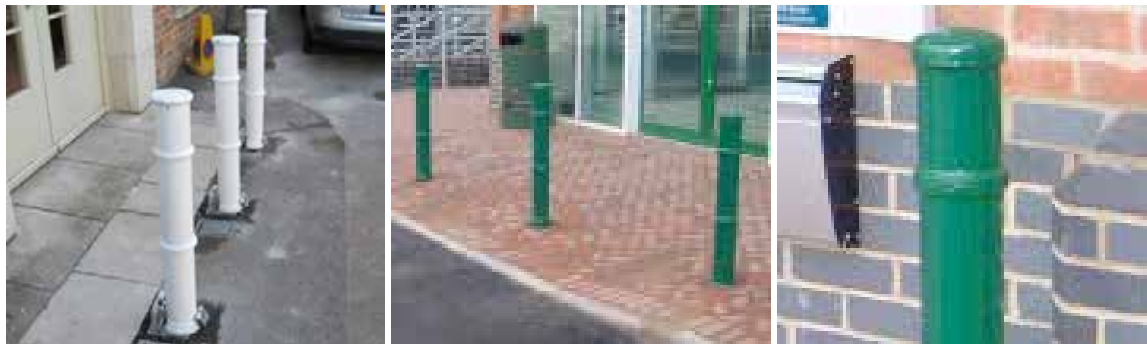

### **The PROCTER PGFC 4000 Ornamental Mild Steel Bollards**

*A functional bollard, elegant in design; the PGFC 4000 Ornamental Mild Steel Bollard is constructed using mild steel and galvanised to ensure its longevity. Caps and rings manufactured from impact resistant malleable cast iron are welded on to the steel body to complete the design.*

*The bollards are available in a galvanised and a galvanised and coated finish. RAL numbers must be specified at time of order.*

*Supplied ragged as standard, flanged and removable versions are also available. Eyelets, hooks and chains can be added to these bollards to complete the decorative effect. Please ask for more information.*

### **Product Range**

<b>Order Code</b>	<b>Description</b>	<b>Lift out weight</b>	<b>Weight</b>
138 120 077	Removable	12.7kg	17.4kg
138 120 079	Removable (Coated Black)	12.7kg	17.4kg
138 120 078	Removable (Coated; Please specify BS/RAL colour)	12.7kg	17.4kg
	<b>Installation Parts</b>		12.7kg
138 120 080	Removable (body only)		12.7kg
138 120 081	Removable (Coated Black) (body only)		12.7kg
138 120 082	Removable (Coated; specify BS/RAL colour) (body only)		

### **Product details**

900mm above ground  
500mm below ground  
114mm diameter tube  
3mm wall thickness

### **Installation & use**

Removable bollards require an excavated hole of at least 300mm square and 500mm deep for the socket. To prevent against vehicle access, PROCTER recommends the distance between bollards does not exceed 1200mm. This product is guaranteed for 12 months (if installed and used correctly).

**Tel Sales : 02920 855756 - Fax : 02920 887005 - Email : Enquiries@procterContracts.co.uk**

Procter Contracts - North  
Isabella Road  
Leeds  
LS25 2DY

Procter Contracts - South West  
11 Pantglas Industrial Estate  
Bedwas  
CF83 8XD

Procter Contracts -South East  
Codham Hall  
Brentwood  
CM13 3JT



### The PROCTER PCGFC5000

The PROCTER range of PCGFC ornamental bollards combine mild steel tube with high grade, impact resistant, malleable cast iron caps and rings. The PCGFC500 is an aesthetically pleasing bollard ideal for providing protection against unauthorised parking or access. The PCGFC range is ideal for use around pedestrian precincts, pavements, play and parking areas, as part of traffic calming measures, pedestrianisation schemes and as a deterrent to ram-raiders.

The PCGFC5000 is available in galvanised, galvanised and coated finishes. It is also available in Ragged for cast-ing in to concrete, Flanged for bolting down or Removable versions.

The PROCTER PCGFC500 is shown in a galvanised and coated black with Ragged fixing and with optional chain.

### Product Range

Order Code	Description	Weight
138 120 081	Ragged (Galvanised)	20.0kg
138 120 083	Ragged (Galvanised & Coated)	20.0kg
138 120 085	Flanged (Galvanised & Coated)	20.0kg
138 120 087	Removable (Galvanised)	29.0kg
138 120 088	Removable (Galvanised & Coated)	29.0kg

#### Accessories & installation parts

138 100 994	M12 Expanding Bolt (Flanged only)
138 100 993	M12 Foundation Bolt (Flanged only)
138 100 995	M12 Rawl Bolt (Flanged only)
138 100 906	40mm Brass Padlock with 2 keys (Removable only)

### Product details

1,000mm Tall.

Ragged Posts 500mm below ground.

Galvanised steel finish.

### Installation & use

Flanged bollards require bolting down to a suitable concrete surface (no less then 300mm cube) by means of three M12 bolts.

Ragged bollards require a hole of at least 600mm deep for casting into concrete.

Ragged bollards are supplied with welded fixing spikes to ensure firm ground anchorage.

Removable bollards require an excavated hole of at least 300mm square and 400mm deep for the socket.

This product is guaranteed for 12 months (*if installed and used correctly*).

**Tel Sales : 02920 855756 - Fax : 02920 887005 - Email : [info@procterstreetfurniture.co.uk](mailto:info@procterstreetfurniture.co.uk)**



### **The PROCTER PGFC 6000 Ornamental Mild Steel Bollards**

*A substantial bollard, with a clean appearance the GFC 6000 Ornamental Mild Steel Bollard is constructed from mild steel and galvanised to ensure its longevity. Caps and rings manufactured from impact resistant malleable cast iron are welded on to the steel body to complete the design.*

*The bollards are available in a galvanised and a galvanised and coated finish. RAL numbers must be specified at time of order.*

*For additional security the bollard can be filled with either, or both, concrete or an additional steel core. Eyelets, hooks and chains can be added to these bollards to complete the decorative effect. Please ask for more information.*

### **Product Range**

<b>Order Code</b>	<b>Description</b>	<b>Weight</b>
138 120 091	Ragged	39.0kg
138 120 092	Ragged (Coated Black)	39.0kg
138 120 093	Ragged (Coated; Please specify BS/RAL colour)	39.0kg
138 120 094	Flanged	31.0kg
138 120 095	Flanged (Coated Black)	31.0kg
138 120 096	Flanged (Coated; Please specify BS/RAL colour)	31.0kg

### **Product details**

1000mm above ground  
500mm below ground  
165mm diameter tube  
5mm wall thickness

### **Installation & use**

Flanged bollards require bolting down to a suitable concrete surface (no less then 300mm cube) by means of three M12 bolts.

Ragged bollards require a hole of at least 500mm deep for casting into concrete.

Ragged bollards are supplied with welded fixing spikes to ensure firm ground anchorage.

To prevent against vehicle access, PROCTER recommends the distance between bollards does not exceed 1200mm.

This product is guaranteed for 12 months (if installed and used correctly).

**Tel Sales : 02920 855756 - Fax : 02920 887005 - Email : Enquiries@procterContracts.co.uk**



### **The PROCTER PGFC 6000 Ornamental Mild Steel Bollards**

A substantial bollard, with a clean appearance the GFC 6000 Ornamental Mild Steel Bollard is constructed from mild steel and galvanised to ensure its longevity. Caps and rings manufactured from impact resistant malleable cast iron are welded on to the steel body to complete the design.

The bollards are available in a galvanised and a galvanised and coated finish. RAL numbers must be specified at time of order.

For additional security the bollard can be filled with either, or both, concrete or an additional steel core. Eyelets, hooks and chains can be added to these bollards to complete the decorative effect. Please ask for more information.

### **Product Range**

Order Code	Description	Lift out weight	Weight
138 120 097	Removable	35.6kg	46.8kg
138 120 098	Removable (Coated Black)	35.6kg	46.8kg
138 120 098	Removable (Coated; Please specify BS/RAL colour)	35.6kg	46.8kg
	<b>Installation Parts</b>		35.6kg
138 120 110	Removable (body only)		35.6kg
138 120 105	Removable (Coated Black) (body only)		35.6kg
138 120 100	Removable (Coated; specify BS/RAL colour) (body only)		

### **Product details**

1000mm above ground  
500mm below ground (ragged only)  
165mm diameter tube  
5mm wall thickness

### **Installation & use**

Removable bollards require an excavated hole of at least 300mm square and 500mm deep for the socket. To prevent against vehicle access, PROCTER recommends the distance between bollards does not exceed 1200mm. This product is guaranteed for 12 months (if installed and used correctly).

**Tel Sales : 02920 855756 - Fax : 02920 887005 - Email : Enquiries@procterContracts.co.uk**

Procter Contracts - North  
Isabella Road  
Leeds  
LS25 2DY

Procter Contracts - South West  
11 Pantglas Industrial Estate  
Bedwas  
CF83 8XD

Procter Contracts -South East  
Codham Hall  
Brentwood  
CM13 3JT



### **The PROCTER PGFC 7000 Ornamental Mild Steel Bollards**

*The PGFC7000 from PROCTER is a traditionally styled ornamental bollard designed to resemble its cast iron relative. The body of the bollard is manufactured from mild steel which is galvanised as standard to ensure its longevity. Caps and rings manufactured from impact resistant malleable cast iron are welded on to the steel body to complete the design.*

*The bollards are available in a galvanised and galvanised and coated finish. RAL numbers must be specified at time of order. Eyelets, hooks and chains can be added to these bollards to complete the decorative effect. Please ask for more information*

### **Product Range**

<b>Order Code</b>	<b>Description</b>	<b>Weight</b>
138 120 131	Ragged	14.4kg
138 120 134	Ragged (Coated Black)	14.4kg
138 120 135	Ragged (Coated; Please specify BS/RAL colour)	14.4kg
138 120 130	Flanged	12.0kg
138 120 132	Flanged (Coated Black)	12.0kg
138 120 136	Flanged (Coated; Please specify BS/RAL colour)	12.0kg

### **Product details**

1000mm above ground  
500mm below ground (ragged only)  
114mm diameter tube  
3mm wall thickness

### **Installation & use**

Flanged bollards require bolting down to a suitable concrete surface (no less than 300mm cube) by means of three M12 bolts.  
Ragged bollards require a hole of at least 500mm deep for casting into concrete.  
Ragged bollards are supplied with welded fixing spikes to ensure firm ground anchorage.  
This product is guaranteed for 12 months (if installed and used correctly).

**Tel Sales : 02920 855756 - Fax : 02920 887005 - Email : [Enquiries@procterContracts.co.uk](mailto:Enquiries@procterContracts.co.uk)**





### **PGFC 7000 Ornamental Mild Steel Bollards**

*The PGFC7000 from PROCTER is a traditionally styled ornamental bollard designed to resemble its cast iron relative. The body of the bollard is manufactured from mild steel which is galvanised as standard to ensure its longevity. Caps and rings manufactured from impact resistant malleable cast iron are welded on to the steel body to complete the design.*

*The bollards are available in a galvanised and galvanised and coated finish. RAL numbers must be specified at time of order. Eyelets, hooks and chains can be added to these bollards to complete the decorative effect. Please ask for more information*

### **Product Range**

<b>Order Code</b>	<b>Description</b>	<b>Lift out weight</b>	<b>Weight</b>
138 120 137	Removable	14.3kg	19.0kg
138 120 140	Removable (Coated Black)	14.3kg	19.0kg
138 120 142	Removable (Coated; Please specify BS/RAL colour)	14.3kg	19.0kg

#### **Installation Parts**

138 120 150	Removable (body only)		14.3kg
138 120 149	Removable (Coated Black) (body only)		14.3kg
138 120 148	Removable (Coated; specify BS/RAL colour) (body only)		14.3kg

### **Product details**

1000mm above ground  
400mm below ground  
114mm diameter tube  
3mm wall thickness

### **Installation & use**

Removable bollards require an excavated hole of at least 300mm square and 400mm deep for the socket.  
This product is guaranteed for 12 months (if installed and used correctly).

**Tel Sales : 02920 855756 - Fax : 02920 887005 - Email : Enquiries@procterContracts.co.uk**

Procter Contracts - North  
Isabella Road  
Leeds  
LS25 2DY

Procter Contracts - South West  
11 Pantglas Industrial Estate  
Bedwas  
CF83 8XD

Procter Contracts -South East  
Codham Hall  
Brentwood  
CM13 3JT