



The PROCTER Chamfered Recycled Plastic Traffic Bollard

Manufactured from 100% recycled UV resistant plastic, the PROCTER Chamfered Recycled Plastic Traffic Bollard is designed to be malleable, but very durable, with a high impact strength.

These round bollards come with three red reflective bands as standard, and are perfect for use in any pedestrian or traffic calming area. The plastic body is impervious to the weather, and is unaffected by frost, rot, and rust. Chemically inert, the bollard is vandal, graffiti and combustion resistant.

Supplied black and ragged as standard, removable versions are also available. Reflective tape can be supplied in any one of six colours; black, blue, orange, red, white and yellow (red as standard, please specify other colours at time of order). Highway Standard reflective bands can replace the existing reflective bands. Please ask for more information.

Product Range

Order Code	Description		Weight
138 107 061	Ragged		23.0kg
		Lift Out Weight	Weight
138 107 161	Removable	17.0kg	21.7kg

Product details

1000mm above ground.
500mm below ground.
150mm diameter tube.

Installation & use

Ragged bollards require a hole of at least 500mm deep for casting into concrete & are supplied with fixing spikes to ensure firm ground anchorage.
Removable bollards require an excavated hole of at least 300mm square and 500mm deep for the socket
To prevent vehicle access, PROCTER recommends the distance between bollards does not exceed 1200mm.
This product is guaranteed for 12 months (if installed and used correctly).

Tel Sales : 02920 855756 - Fax : 02920 887005 - Email : Enquiries@procterContracts.co.uk

Procter Contracts - North
Isabella Road
Leeds
LS25 2DY

Procter Contracts - South West
11 Pantglas Industrial Estate
Bedwas
CF83 8XD

Procter Contracts -South East
Codham Hall
Brentwood
CM13 3JT



The PROCTER Diamond Recycled Plastic Traffic Bollard

Manufactured from 100% recycled UV resistant plastic, the PROCTER Diamond Top Recycled Plastic Traffic Bollard is designed to be malleable, but very durable, with a high impact strength.

These square bollards come with three red and white reflective bands as standard, and are perfect for use in any pedestrian or traffic calming area. The plastic body is impervious to the weather, and is unaffected by frost, rot, and rust. Chemically inert, the bollard is vandal and graffiti resistant and is resilient to combustion.

Supplied black and ragged as standard, removable versions are also available. Reflective tape can be supplied in any one of six colours; black, blue, orange, red, white and yellow (red as standard, please specify other colours at time of order). Highway Standard reflective bands can replace the existing reflective bands. Please ask for more information.

Product Range

Order Code	Description	Lift Out Weight	Weight
138 107 071	Ragged		27.0kg
138 107 171	Removable	23.0kg	27.7kg

Product details

- 1000mm above ground.
- 400mm below ground (ragged).
- 500mm below ground (removable).
- 150mm x 150mm diameter tube.

Installation & use

Ragged bollards require a hole of at least 400mm deep for casting into concrete & are supplied with fixing spikes to ensure firm ground anchorage.
 Removable bollards require an excavated hole of at least 300mm square and 500mm deep for the socket
 To prevent vehicle access, PROCTER recommends the distance between bollards does not exceed 1200mm.
 This product is guaranteed for 12 months (if installed and used correctly).

Tel Sales : 02920 855756 - Fax : 02920 887005 - Email : Enquiries@procterContracts.co.uk

Procter Contracts - North
Isabella Road
Leeds
LS25 2DY

Procter Contracts - South West
11 Pantglas Industrial Estate
Bedwas
CF83 8XD

Procter Contracts -South East
Codham Hall
Brentwood
CM13 3JT



The PROCTER Domed Top Recycled Plastic Traffic Bollard

Manufactured from 100% recycled UV resistant plastic, the PROCTER Domed Top Recycled Plastic Traffic Bollard is designed to be malleable, but very durable, with a high impact strength.

These round bollards come with three red reflective bands as standard, and are perfect for use in any pedestrian or traffic calming area. The plastic body is impervious to the weather, and is unaffected by frost, rot, and rust. Chemically inert, the bollard is vandal and graffiti resistant and is resilient to combustion.

Supplied black, and ragged as standard, removable versions are also available. Reflective tape can be supplied in a range of colours (please specify BS/RAL number at time of order). Highway Standard reflective bands can replace the existing reflective bands. Please ask for more information.

Product Range

Order Code	Description		Weight
138 107 051	Ragged		22.0kg
		Lift Out Weight	Weight
138 107 151	Removable	20.0kg	24.7kg

Product details

- 1000mm above ground.
- 400mm below ground (ragged)
- 500mm below ground (removable)
- 150mm diameter tube.

Installation & use

Ragged bollards require a hole of at least 400mm deep for casting into concrete & are supplied with fixing spikes to ensure firm ground anchorage.
 Removable bollards require an excavated hole of at least 400mm square and 500mm deep for the socket.
 To prevent vehicle access, PROCTER recommends the distance between bollards does not exceed 1200mm.
 This product is guaranteed for 12 months (if installed and used correctly).

Tel Sales : 02920 855756 - Fax : 02920 887005 - Email : Enquiries@procterContracts.co.uk

Procter Contracts - North
 Isabella Road
 Leeds
 LS25 2DY

Procter Contracts - South West
 11 Pantglas Industrial Estate
 Bedwas
 CF83 8XD

Procter Contracts -South East
 Codham Hall
 Brentwood
 CM13 3JT



The PROCTER Hazard Recycled Plastic Traffic Bollards.

Manufactured from 100% recycled UV resistant plastic, the PROCTER Hazard Type B Recycled Plastic Traffic Bollard is designed to be malleable, but very durable, with a high impact strength.

These round bollards come with two reflective plates, making them extremely visible, even in poor weather conditions, or at night, and are perfect for use in any pedestrian or traffic calming area.

The plastic body is impervious to the weather, and is unaffected by frost, rot, and rust. Chemically inert, the bollard is vandal and graffiti resistant and is resilient to combustion.

Supplied black, with a single white band, and ragged as standard, removable versions are also available. Please ask for more information.

Product Range

Order Code	Description		Weight
138 107 094	Ragged		23.0kg
		Lift Out Weight	Weight
138 107 194	Removable	20.0kg	24.7kg

Product details

- 1000mm above ground.
- 400mm below ground (ragged).
- 500mm below ground (removable).
- 150mm diameter tube.
- Two reflective plates; one white, one red.

Installation & use


Ragged bollards require a hole of at least 400mm deep for casting into concrete & are supplied with fixing spikes to ensure firm ground anchorage.
Removable bollards require an excavated hole of at least 300mm square and 500mm deep for the socket.
To prevent against vehicle access, PROCTER recommends the distance between bollards does not exceed 1200mm.
This product is guaranteed for 12 months (if installed and used correctly).

Tel Sales : 02920 855756 - Fax : 02920 887005 - Email : Enquiries@procterContracts.co.uk

Procter Contracts - North
Isabella Road
Leeds
LS25 2DY

Procter Contracts - South West
11 Pantglas Industrial Estate
Bedwas
CF83 8XD

Procter Contracts -South East
Codham Hall
Brentwood
CM13 3JT

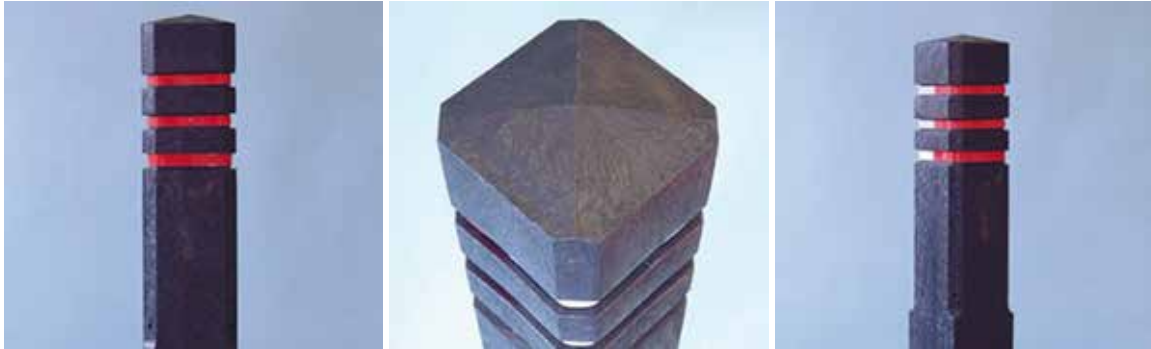

The PROCTER Diamond Recycled Plastic Traffic Bollard

Manufactured from 100% recycled UV resistant plastic, the PROCTER Diamond Top Recycled Plastic Traffic Bollard is designed to be malleable, but very durable, with a high impact strength.

These square bollards come with three red and white reflective bands as standard, and are perfect for use in any pedestrian or traffic calming area. The plastic body is impervious to the weather, and is unaffected by frost, rot, and rust. Chemically inert, the bollard is vandal and graffiti resistant and is resilient to combustion.

Supplied black and ragged as standard, removable versions are also available. Reflective tape can be supplied in any one of six colours; black, blue, orange, red, white and yellow (red as standard, please specify other colours at time of order). Highway Standard reflective bands can replace the existing reflective bands. Please ask for more information.

Product Range

Order Code	Description	Weight
138 107 071	Ragged	27.0kg
		Lift Out Weight
138 107 171	Removable	23.0kg
		Weight
		27.7kg

Product details

1000mm above ground.
400mm below ground (ragged).
500mm below ground (removable).
150mm x 150mm diameter tube.

Installation & use

Ragged bollards require a hole of at least 400mm deep for casting into concrete & are supplied with fixing spikes to ensure firm ground anchorage.
Removable bollards require an excavated hole of at least 300mm square and 500mm deep for the socket
To prevent vehicle access, PROCTER recommends the distance between bollards does not exceed 1200mm.
This product is guaranteed for 12 months (if installed and used correctly).

Tel Sales : 02920 855756 - Fax : 02920 887005 - Email : Enquiries@procterContracts.co.uk

Procter Contracts - North
Isabella Road
Leeds
LS25 2DY

Procter Contracts - South West
11 Pantglas Industrial Estate
Bedwas
CF83 8XD

Procter Contracts -South East
Codham Hall
Brentwood
CM13 3JT