



The PROCTER Retractable Post 500

The Retractable Post is a simple, cost effective, yet highly effective way to prevent unwanted vehicle access. The Retractable Post is raised and lowered vertically. When lowered the post is fully below ground and covered using the integral lid. The post is padlockable (padlock not supplied) in the raised position by first rotating the post 45° and then attaching the padlock between the post to the lid. The Retractable Post 500 is 500mm above ground in the raised position.

The Retractable Post is ideal for protecting vehicle forecourts, commercial premises, car parks and domestic drive-ways.

Shown are the 76mm & 90mm versions of the Retractable Post 500 in galvanised finish.

Product Range

Order Code	Description	Lift-up Weight	Product Weight
138 130 372	60mm (Galvanised)	3.3kg	12.6kg
138 130 377	60mm (Galvanised & Colour Coated)	3.3kg	12.6kg
138 130 378	60mm (Stainless)	3.0kg	12.3kg
138 130 370	76mm (Galvanised)	4.0kg	13.2kg
138 130 375	76mm (Galvanised & Colour Coated)	4.0kg	13.2kg
138 130 379	76mm (Stainless)	3.7kg	12.9kg
138 130 410	90mm (Galvanised)	5.0kg	20.7kg
138 130 413	90mm (Galvanised & Colour Coated)	5.0kg	20.7kg
138 130 415	90mm (Stainless)	4.7kg	20.4kg

Accessories & installation parts

138 100 907	40mm Brass Padlock with 2 keys
138 150 325	Corbin Security Padlock with 2 keys

Product details

500mm Tall (When raised).

760mm Below Ground.

Galvanised Mild Steel or Stainless Steel post.

Installation & use

It is recommended that posts are placed no further than 1,200mm apart to ensure no vehicle may pass between the raised posts.

An excavated hole of approximately 900mm deep and 300mm diameter is required for installation.

Provision for suitable drainage must be made (chippings or similar) at the bottom of the hole. The uppermost 3-400mm must be concrete.

The lid of the post should be no more than 10mm above finished ground level.

This product is guaranteed for 12 months (*if installed and used correctly*).

Tel Sales : 02920 855756 - Fax : 02920 887005 - Email : Enquiries@procterContracts.co.uk



The PROCTER Retractable Post 745

The Retractable Post is a simple, cost effective, yet highly effective way to prevent unwanted vehicle access. The Retractable Post is raised and lowered vertically. When lowered the post is fully below ground and covered using the integral lid. The post is padlockable (padlock not supplied) in the raised position by first rotating the post 45° and then attaching the padlock between the post to the lid.

The Retractable Post is ideal for protecting vehicle forecourts, commercial premises, car parks and domestic drive-ways.

Shown is the 90mm (Galvanised) version of the RetractablePost with optional Red & White chevron reflective label.

Product Range

Order Code	Description	Lift-up Weight	Product Weight
138 130 362	60mm (Galvanised)	4.6kg	17.6kg
138 130 367	60mm (Galvanised & Colour Coated)	4.6kg	17.6kg
138 130 368	60mm (Stainless)	4.4kg	17.4kg
138 130 360	76mm (Galvanised)	5.5kg	18.5kg
138 130 365	76mm (Galvanised & Colour Coated)	5.5kg	18.5kg
138 130 369	76mm (Stainless)	5.3kg	18.3kg
138 130 400	90mm (Galvanised)	6.6kg	27.0kg
138 130 405	90mm (Galvanised & Colour Coated)	6.6kg	27.0kg
138 130 419	90mm (Stainless)	6.4kg	26.8kg

Accessories & installation parts

138 100 907	40mm Brass Padlock with 2 keys
138 150 325	Corbin Security Padlock with 2 keys
138 810 598	Red & White Chevron Reflective Label

Product details

745mm Tall (When raised).

1010mm Below Ground.

Galvanised Steel or Stainless Steel finish.

Installation & use

It is recommended that posts are placed no further than 1,200mm apart to ensure no vehicle may pass between the raised posts.

An excavated hole of approximately 1,200mm deep and 300mm diameter is required for installation.

Provision for suitable drainage must be made (chippings or similar) at the bottom of the hole. The uppermost 3-400mm must be concrete.

The lid of the post should be no more than 10mm above finished ground level.

This product is guaranteed for 12 months (if installed and used correctly).

Tel Sales : 02920 855756 - Fax : 02920 887005 - Email : Enquiries@procterContracts.co.uk



The PROCTER Retractable Post-Ground Lock 500

The Retractable Post-Ground Lock offers a highly effective and robust way to protect premises and vehicles. The Retractable Post-Ground Lock is raised and lowered vertically. When raised the post is 500mm above ground, when lowered the post is fully below ground and covered using the integral lid. The post is lockable in the raised position by rotating the post 45° and then pressing the high-security push button 7-pin security lock. The post is unlocked using the supplied key, rotated and then lowered.

The Retractable Post-Ground Lock is ideal for protecting vehicle forecourts, commercial premises, car parks and domestic driveways.

Shown is 90mm version of the Retractable Post-Ground Lock 500.

Product Range

Order Code	Description	Lift-up Weight	Product Weight
138 130 392	60mm	3.5kg	14.4kg
138 130 397	60mm (Coated)	3.5kg	14.4kg
138 130 390	76mm	4.2kg	15.1kg
138 130 395	76mm (Coated)	4.2kg	15.1kg
138 130 425	90mm	5.0kg	23.5kg

Accessories & installation parts

138 811 290 Spare key (please specify key number/product)

Product details

500mm Tall (When raised).

815mm Below Ground.

Galvanised or galvanised and coated finish.

Installation & use

It is recommended that posts are placed no further than 1,200mm apart to ensure no vehicle may pass between the raised posts.

An excavated hole of approximately 900mm deep and 300mm diameter is required for installation.

Provision for suitable drainage must be made (chippings or similar) at the bottom of the hole. The uppermost 3-400mm must be concrete.

The lid of the post should be no more than 10mm above finished ground level.

Keep the sliding post clean and occasionally lubricate the lock with Ambersil 40+ or similar.

This product is guaranteed for 12 months (*if installed and used correctly*).

Tel Sales : 02920 855756 - Fax : 02920 887005 - Email : Enquiries@procterContracts.co.uk



The PROCTER Retractable Post-Ground Lock 500 (Stainless)

The Retractable Post-Ground Lock offers a highly effective and robust way to protect premises and vehicles. The Retractable Post-Ground Lock is raised and lowered vertically and is 500mm tall when raised. The 500 variant of the Retractable Post-Ground Lock benefits from a lower overall height, thus reducing the required excavation depth and offering a more subtle protection solution. When lowered the post is fully below ground and covered using the integral lid. The post is lockable in the raised position by rotating the post 45° and then pressing the high-security push button 7-pin security lock. The post is unlocked using the supplied key, rotated and then lowered.

The Retractable Post-Ground Lock is ideal for protecting vehicle forecourts, commercial premises, car parks and domestic driveways.

Shown is the 90mm version of the Stainless Steel Retractable Post-Ground Lock 500.

Product Range

Order Code	Description	Lift-up Weight	Product Weight
138 130 398	60mm	2.6kg	13.5kg
138 130 399	76mm	3.0kg	14.0kg
138 130 435	90mm	4.0kg	22.5kg

Accessories & installation parts

138 811 290 Spare key (please specify key number/product)

Product details

500mm Tall (When raised).
815mm Below Ground.
Mild Steel Galvanised Socket.
Grade 304 Stainless Steel Body.

Installation & use

It is recommended that posts are placed no further than 1,200mm apart to ensure no vehicle may pass between the raised posts. An excavated hole of approximately 900mm deep and 300mm diameter is required for installation. Provision for suitable drainage must be made (chippings or similar) at the bottom of the hole. The uppermost 3-400mm must be concrete. The lid of the post should be no more than 10mm above finished ground level. Keep the sliding post clean and occasionally lubricate the lock with Ambersil 40+ or similar. This product is guaranteed for 12 months (if installed and used correctly).

Tel Sales : 02920 855756 - Fax : 02920 887005 - Email : Enquiries@procterContracts.co.uk

Procter Contracts - North
Isabella Road
Leeds
LS25 2DY

Procter Contracts - South West
11 Pantglas Industrial Estate
Bedwas
CF83 8XD

Procter Contracts -South East
Codham Hall
Brentwood
CM13 3JT



The PROCTER Retractable Post-Ground Lock 745

The Retractable Post-Ground Lock offers a highly effective and robust way to protect premises and vehicles. The Retractable Post-Ground Lock is raised and lowered vertically. When lowered the post is fully below ground and covered using the integral lid. The post is lockable in the raised position by rotating the post 45° and then pressing the high-security push button 7-pin security lock. The post is unlocked using the supplied key, rotated and then lowered.

The Retractable Post-Ground Lock is ideal for protecting vehicle forecourts, commercial premises, car parks and domestic driveways.

Shown is 90mm version of the 90mm Retractable Post-Ground Lock 745 with optional PROCTER Red & White chevron reflective label.

Product Range

Order Code	Description	Lift-up Weight	Product Weight
138 130 382	60mm	4.6kg	17.6kg
138 130 387	60mm (Coated)	4.7kg	17.7kg
138 130 380	76mm	5.5kg	18.5kg
138 130 385	76mm (Coated)	5.7kg	18.7kg
138 130 420	90mm	6.6kg	30.2kg
138 130 422	90mm (Coated)	6.8kg	30.4kg
138 130 430	101mm	9.3kg	40.0kg
138 130 432	101mm (Coated)	9.5kg	40.2kg

Accessories & installation parts

138 811 290	Spare key (please specify key number/product)
138 810 598	PROCTER Red & White Chevron Reflective Label

Product details

745mm Tall (When raised).

1070mm Below Ground.

Galvanised or galvanised and coated finish.

Installation & use

It is recommended that posts are placed no further than 1,200mm apart to ensure no vehicle may pass between the raised posts.

An excavated hole of approximately 1,200mm deep and 300mm diameter is required for installation.

Provision for suitable drainage must be made (chippings or similar) at the bottom of the hole. The uppermost 3-400mm must be concrete.

The lid of the post should be no more than 10mm above finished ground level.

Keep the sliding post clean and occasionally lubricate the lock with Ambersil 40+ or similar.

This product is guaranteed for 12 months (*if installed and used correctly*).

Tel Sales : 02920 855756 - Fax : 02920 887005 - Email : Enquiries@procterContracts.co.uk



The PROCTER Retractable Post-Ground Lock 745

The Retractable Post-Ground Lock offers a highly effective and robust way to protect premises and vehicles. The Retractable Post-Ground Lock is raised and lowered vertically and is 745mm tall when raised. When lowered the post is fully below ground and covered using the integral lid. The post is lockable in the raised position by rotating the post 45° and then pressing the high-security push button 7-pin security lock. The post is unlocked using the supplied key, rotated and then lowered.

The Retractable Post-Ground Lock is ideal for protecting vehicle forecourts, commercial premises, car parks and domestic driveways.

Shown is the 90mm version of the Stainless Steel RetractaPost-GL 745.

Product Range

Order Code	Description	Lift-up Weight	Product Weight
138130388	60mm	3.4kg	16.4kg
138130389	76mm	4.0kg	17.0kg
138130429	90mm	5.0kg	28.5kg
138130439	101mm	5.8kg	41.0kg

Accessories & installation parts

138 811 290 Spare key (please specify key number/product)

Product details

745mm Tall (When raised).
1070mm Below Ground.
Mild Steel Galvanised Socket.
Grade 304 Stainless Steel Body.

Installation & use

It is recommended that posts are placed no further than 1,200mm apart to ensure no vehicle may pass between the raised posts. An excavated hole of approximately 1,200mm deep and 300mm diameter is required for installation. Provision for suitable drainage must be made (chippings or similar) at the bottom of the hole. The uppermost 3-400mm must be concrete. The lid of the post should be no more than 10mm above finished ground level. Keep the sliding post clean and occasionally lubricate the lock with Ambersil 40+ or similar. This product is guaranteed for 12 months (*if installed and used correctly*).

Tel Sales : 02920 855756 - Fax : 02920 887005 - Email : Enquiries@procterContracts.co.uk



The PROCTER Retractable Post-Ground Lock 900

The Retractable Post-Ground Lock 900 offers a highly effective and heavy duty way to protect premises and vehicles. The Retractable Post-Ground Lock 900 is 900mm above ground when raised. Due to the heavy weight of the post, it incorporates PROCTER's lift assist system, which greatly reduces the lift up weight of the product and controls the post when lowering (114mm is available with or without lift assist). When lowered the post is fully below ground and covered using the integral lid. The post is lockable in the raised position by rotating the post 45° and then pressing the high-security push button 7-pin security lock. The post is unlocked using the supplied key, rotated and then lowered. The Retractable Post-Ground Lock is ideal for protecting vehicle forecourts, commercial premises, car parks and domestic driveways.

Shown is the 114mm Retractable Post-Ground Lock with optional PROCTER Red & White chevron reflective label.

Product Range

Order Code	Description	Lift-up Weight	Product Weight
138 130 440	114mm	12.0kg	47.0kg
138 130 450	114mm (Lift Assist)	4.0kg (approx.)	50.4kg
138 130 452	114mm (Coated Yellow, Lift Assist)	4.0kg (approx.)	50.4kg
138 130 460	139mm (Lift Assist)	6.0kg (approx.)	62.0kg
138 130 470	168mm (Lift Assist)	8.0kg (approx.)	65.5kg
138 130 473	168mm (Coated, Lift Assist)	8.0kg (approx.)	65.5kg

Accessories & installation parts

138 811 290	Spare key (please specify key number/product)
138 810 598	AUTOPA Red & White Chevron Reflective Label

Product details

900mm Tall (When raised).
1250mm Below Ground.
Galvanised or galvanised and coated finish.

Installation & use

It is recommended that posts are placed no further than 1,200mm apart to ensure no vehicle may pass between the raised posts. An excavated hole of approximately 1,400mm deep and 300mm diameter is required for installation. Provision for suitable drainage must be made (chippings or similar) at the bottom of the hole. The uppermost 3-400mm must be concrete. The lid of the post should be no more than 10mm above finished ground level. Keep the sliding post clean and occasionally lubricate the lock with Ambersil 40+ or similar. This product is guaranteed for 12 months (*if installed and used correctly*).

Tel Sales : 02920 855756 - Fax : 02920 887005 - Email : Enquiries@procterContracts.co.uk



The PROCTER Retractable Post-Ground Lock 900

The Retractable Post-Ground Lock offers a highly effective and robust way to protect premises and vehicles. The Retractable Post-Ground Lock is raised and lowered vertically and is 900mm tall when raised. Due to the heavy weight of the post it includes PROCTER's lift assist system which greatly reduces the lift up weight of the product and controls the post when lowering (114mm is available with or without lift assist). When lowered the post is fully below ground and covered using the integral lid. The post is lockable in the raised position by rotating the post 45° and then pressing the high-security push button 7-pin security lock. The post is unlocked using the supplied key, rotated and then lowered. The Retractable Post-Ground Lock is ideal for protecting vehicle forecourts, commercial premises, car parks and domestic driveways.

Product Range

Order Code	Description	Lift-up Weight	Product Weight
138 130 449	114mm	7.4kg	42.7kg
138 130 459	114mm (Lift Assist)	4.0kg (approx.)	45.9kg
138 130 469	139mm (Lift Assist)	6.0kg (approx.)	50.6kg
138 130 479	168mm (Lift Assist)	6.0kg (approx.)	51.5kg

Accessories & installation parts

138 811 290 Spare key (please specify key number/product)

Product details

900mm Tall (When raised).
1250mm Below Ground.
Mild Steel Galvanised Socket.
Grade 304 Stainless Steel Body.

Installation & use

It is recommended that posts are placed no further than 1,200mm apart to ensure no vehicle may pass between the raised posts. An excavated hole of approximately 1,400mm deep and 300mm diameter is required for installation. Provision for suitable drainage must be made (chippings or similar) at the bottom of the hole. The uppermost 3-400mm must be concrete. The lid of the post should be no more than 10mm above finished ground level. Keep the sliding post clean and occasionally lubricate the lock with Ambersil 40+ or similar. This product is guaranteed for 12 months (*if installed and used correctly*).

Tel Sales : 02920 855756 - Fax : 02920 887055 - Email : Enquiries@procterContracts.co.uk



The PROCTER Telescopic Retractable Post 745

The PROCTER Telescopic Retractable Post 745 is a highly effective and robust way to protect against unwanted vehicle access to premises. The Telescopic Retractable Post is a retractable, telescopic post with an integral 7-pin security lock located in the top of the post. The security locking system has been developed by PROCTER to ensure the post will withstand a wide range of attacks.

The Telescopic Retractable Post 745 is 745mm above ground (when raised) and is available in galvanised steel or stainless steel finishes. A wide range of colour coating options are available (shown above in red and blue). The post is available in 90mm diameter finish (galvanised or stainless).

The Telescopic Retractable Post is ideal for protecting vehicle forecourts, commercial properties, car parks and domestic driveways.

Product Range

Order Code	Description	Lift-up Weight	Product Weight
138 130 601	90mm (Galvanised)	8.8kg	32.0kg
138 130 603	90mm (Galvanised & Coated Yellow)	8.8kg	32.0kg
138 130 605	90mm (Galvanised & Colour Coated)	8.8kg	32.0kg
138 130 621	90mm (Stainless)	6.8kg	30.0kg

Accessories & installation parts

138 811 290 Spare Key (please specify key number/product)

Product details

745mm tall (When Raised).

1,070mm Below Ground.

Galvanised steel finish, Stainless Steel finish or Galvanised and Colour Coated (please specify BS/RAL Colour)

Installation & use

It is recommended that posts are placed no further than 1,200mm apart to ensure no vehicle may pass between the raised posts.

An excavated hole of approximately 1,200mm deep and 300mm diameter is required for installation. Provision for suitable drainage must be made (chippings or similar) at the bottom of the hole. The uppermost 3-400mm must be concrete.

The lid of the post should be no more than 10mm above finished ground level.

Keep the sliding post clean and occasionally lubricate the lock with Ambersil 40+ or similar.

This product is guaranteed for 12 months (*if installed and used correctly*).

Tel Sales : 02920 855756 - Fax : 02920 887005 - Email : Enquiries@procterContracts.co.uk



The PROCTER Square Retractable Post 745

The Square Retractable Post is a simple, cost effective, yet highly effective way to prevent unwanted vehicle access. The Square Retractable Post is raised and lowered vertically. When lowered the post is fully below ground and covered using the integral lid. The post is padlockable (padlock not supplied) in the raised position by first rotating the post 45° and then attaching the padlock between the post to the lid.

The Square Retractable Post is ideal for protecting vehicle forecourts, commercial premises, car parks and domestic driveways.

Shown is the 70mm x 70mm version of the Square Retractable Post with optional Red & White chevron reflective label.

Product Range

Order Code	Description	Lift-up Weight	Product Weight
138 130 361	60mm x 60mm (Galvanised)	5.4kg	18.4kg
138 130 366	60mm x 60mm (Galvanised & Colour Coated)	5.4kg	18.4kg
138 130 401	70mm x 70mm (Galvanised)	6.2kg	26.0kg
138 130 404	70mm x 70mm (Galvanised & Colour Coated)	6.2kg	26.0kg

Accessories & installation parts

138 100 907	40mm Brass Padlock with 2 keys
138 150 325	Corbin Security Padlock with 2 keys
138 810 598	PROCTER Red & White Chevron Reflective Label

Product details

745mm Tall (When raised).
1010mm Below Ground.
Galvanised or galvanised and coated finish.

Installation & use

It is recommended that posts are placed no further than 1,200mm apart to ensure no vehicle may pass between the raised posts. An excavated hole of approximately 1,200mm deep and 300mm diameter is required for installation. Provision for suitable drainage must be made (chippings or similar) at the bottom of the hole. The uppermost 3-400mm must be concrete. The lid of the post should be no more than 10mm above finished ground level. This product is guaranteed for 12 months (if installed and used correctly).

Tel Sales : 02920 855756 - Fax : 02920 887005 - Email : Enquiries@procterContracts.co.uk



The PROCTER Square Retractable Post-Ground Lock 500

The Square Retractable Post-Ground Lock 500 offers a highly effective and robust way to protect premises and vehicles. The Retractable Post-Ground Lock is raised and lowered vertically. The post is 500mm above ground when raised and is fabricated from square mild steel tube which is then galvanised.

When lowered the post is fully below ground and covered using the integral lid. The post is lockable in the raised position by rotating the post 45° and then pressing the high-security push button 7-pin security lock. The post is unlocked using the supplied key, rotated and then lowered.

The Retractable Post-Ground Lock is ideal for protecting vehicle forecourts, commercial premises, car parks and domestic driveways.

Shown is the 60mm Square Retractable Post-Ground Lock galvanised with optional PROCTER Red & White chevron reflective label.

Product Range

Order Code	Description	Lift-up Weight	Product Weight
138 130 391	60mm x 60mm	4.2kg	15.1kg
138 130 396	60mm x 60mm (Coated)	4.2kg	15.1kg

Accessories & installation parts

138 811 290	Spare key (please specify key number/product)
138 810 598	Red & White Chevron Reflective Label

Product details

500mm Tall (When raised).

815mm Below Ground.

Galvanised or galvanised and coated finish.

Installation & use

It is recommended that posts are placed no further than 1,200mm apart to ensure no vehicle may pass between the raised posts.

An excavated hole of approximately 900mm deep and 300mm diameter is required for installation.


Provision for suitable drainage must be made (chippings or similar) at the bottom of the hole. The uppermost 3-400mm must be concrete.

The lid of the post should be no more than 10mm above finished ground level.

Keep the sliding post clean and occasionally lubricate the lock with Ambersil 40+ or similar.

This product is guaranteed for 12 months (*if installed and used correctly*).

Tel Sales : 02920 855756 - Fax : 02920 887005 - Email : Enquiries@procterContracts.co.uk

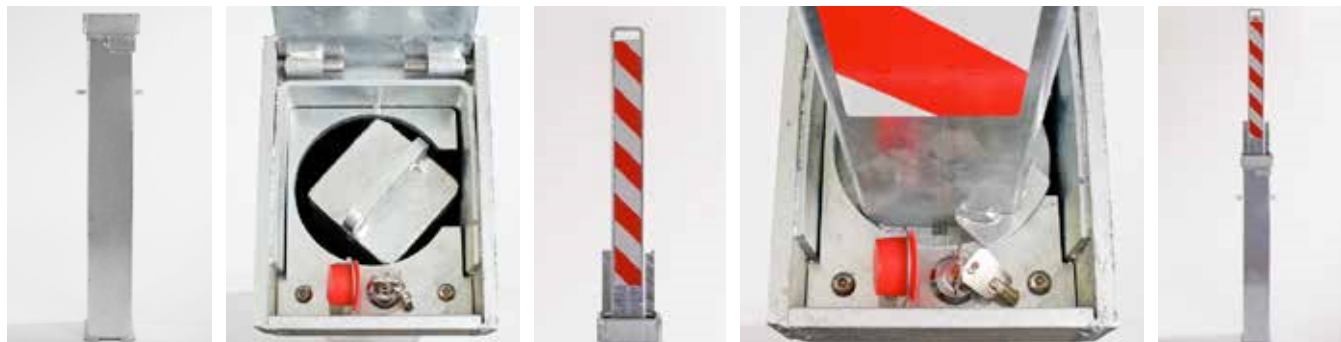

The PROCTER Square Retractable Post-Ground Lock 745

The Square Retractable Post-Ground Lock 745 offers a highly effective and robust way to protect premises and vehicles. The Retractable Post-Ground Lock is raised and lowered vertically. The post is 745mm above ground when raised and is fabricated from square mild steel tube which is then galvanised.

When lowered the post is fully below ground and covered using the integral lid. The post is lockable in the raised position by rotating the post 45° and then pressing the high-security push button 7-pin security lock. The post is unlocked using the supplied key, rotated and then lowered.

The Retractable Post-Ground Lock is ideal for protecting vehicle forecourts, commercial premises, car parks and domestic driveways.

Shown is 90mm x 90mm version of the RetractaPost-GL with optional PROCTER Red & White chevron reflective label.

Product Range

Order Code	Description	Lift-up Weight	Product Weight
138 130 381	60mm x 60mm	5.4kg	18.4kg
138 130 386	60mm x 60mm (Coated)	5.6kg	18.6kg
138 130 427	70mm x 70mm	6.2kg	19.2kg
138 130 421	90mm x 90mm	10.8kg	41.5kg
138 130 423	90mm x 90mm (Coated)	11.1kg	41.8kg

Accessories & installation parts

138 811 290	Spare key (please specify key number/product)
138 810 598	PROCTER Red & White Chevron Reflective Label

Product details

745mm Tall (When raised).

1070mm Below Ground.

Galvanised or galvanised and coated finish.

Installation & use

It is recommended that posts are placed no further than 1,200mm apart to ensure no vehicle may pass between the raised posts.

An excavated hole of approximately 1,200mm deep and 300mm diameter is required for installation.

Provision for suitable drainage must be made (chippings or similar) at the bottom of the hole. The uppermost 3-400mm must be concrete.

The lid of the post should be no more than 10mm above finished ground level.

Keep the sliding post clean and occasionally lubricate the lock with Ambersil 40+ or similar.

This product is guaranteed for 12 months (*if installed and used correctly*).

Tel Sales : 02920 855756 - Fax : 02920 887005 - Email : Enquiries@procterContracts.co.uk



The PROCTER Square Retractable Post-Ground Lock 900

The Square Retractable Post-Ground Lock 900 is a highly effective, heavy duty way to protect entrances to premises from vehicles. The Square Retractable Post-Ground Lock 900 is 900mm above ground when raised and is constructed from square galvanised steel tube. Due to the heavy weight of the post, it incorporates PROCTER's lift assist system which greatly reduces the lift up weight of the product and controls the post during lowering.

When lowered the post is fully below ground and covered using the integral lid. The post is lockable in the raised position by rotating the post 45° and then pressing the high-security push button 7-pin security lock. The post is unlocked using the supplied key, rotated and then lowered. The Square Retractable Post-Ground Lock 900 is ideal for the heavy duty protection required for protecting vehicle forecourts, commercial premises and car parks.

Shown is the Square RetractaPost-GL 900 with optional PROCTER Red & White chevron reflective label.

Product Range

Order Code	Description	Lift-up Weight	Product Weight
138 130 451	120mm x 120mm (Lift Assist)	8.0kg (approx.)	63.0kg

Accessories & installation parts

138 811 290	Spare key (please specify key number/product)
138 810 598	PROCTER Red & White Chevron Reflective Label

Product details

900mm Tall (When raised).
1250mm Below Ground.
Galvanised or galvanised and coated finish.

Installation & use

It is recommended that posts are placed no further than 1,200mm apart to ensure no vehicle may pass between the raised posts. An excavated hole of approximately 1,400mm deep and 300mm diameter is required for installation. Provision for suitable drainage must be made (chippings or similar) at the bottom of the hole. The uppermost 3-400mm must be concrete. The lid of the post should be no more than 10mm above finished ground level. Keep the sliding post clean and occasionally lubricate the lock with Ambersil 40+ or similar. This product is guaranteed for 12 months (*if installed and used correctly*).

Tel Sales : 02920 855756 - Fax : 02920 887005 - Email : Enquiries@procterContracts.co.uk



The PROCTER Square Retractable Post-GL 900

The Square Retractable Post-Ground Lock 900 is a highly effective, heavy duty way to protect entrances to premises from vehicles. The Square Retractable Post-Ground Lock 900 is 900mm above ground when raised and is constructed from square galvanised steel tube. Due to the heavy weight of the post, it incorporates PROCTER's lift assist system which greatly reduces the lift up weight of the product and controls the post during lowering.

When lowered the post is fully below ground and covered using the integral lid. The post is lockable in the raised position by rotating the post 45° and then pressing the high-security push button 7-pin security lock. The post is unlocked using the supplied key, rotated and then lowered. The Square Retractable Post-GL 900 is ideal for the heavy duty protection required for protecting vehicle forecourts, commercial premises and car parks.

Shown is the Square Retractable Post-GL 900 with optional PROCTER Red & White chevron reflective label.

Product Range

Order Code	Description	Lift-up Weight	Product Weight
138 130 451	120mm x 120mm (Lift Assist)	8.0kg (approx.)	63.0kg

Accessories & installation parts

138 811 290	Spare key (please specify key number/product)
138 810 598	PROCTER Red & White Chevron Reflective Label

Product details

900mm Tall (When raised).
1250mm Below Ground.
Galvanised or galvanised and coated finish.

Installation & use

It is recommended that posts are placed no further than 1,200mm apart to ensure no vehicle may pass between the raised posts. An excavated hole of approximately 1,400mm deep and 300mm diameter is required for installation. Provision for suitable drainage must be made (chippings or similar) at the bottom of the hole. The uppermost 3-400mm must be concrete. The lid of the post should be no more than 10mm above finished ground level. Keep the sliding post clean and occasionally lubricate the lock with Ambersil 40+ or similar. This product is guaranteed for 12 months (*if installed and used correctly*).

Tel Sales : 02920 855756 - Fax : 02920 887005 - Email : Enquiries@procterContracts.co.uk



The PROCTER Square Telescopic Retractable Post 745

The PROCTER Square Telescopic Retractable Post 745 is a highly effective and robust way to protect against unwanted vehicle access to premises. The Square Telescopic Retractable Post is a retractable, telescopic post with an integral 7-pin security lock located in the top of the post. The security locking system has been developed by PROCTER

to ensure the post will withstand a wide range of attacks.

The Square Telescopic Retractable Post 745 is 745mm above ground (when raised) and is available in galvanised steel. A wide range of colour coating options are available (shown above in yellow). The post is available in 90mm square tube.

The Telescopic Retractable Post is ideal for protecting vehicle forecourts, commercial properties, car parks and domestic driveways.

Product Range

Order Code	Description	Lift-up Weight	Product Weight
138 130 631	90mm x 90mm (Galvanised)	10.0kg	33.0kg
138 130 633	90mm x 90mm (Galvanised & Coated Yellow)	10.0kg	33.0kg
138 130 635	90mm x 90mm (Galvanised & Colour Coated)	10.0kg	33.0kg

Accessories & installation parts

138 811 290 Spare Key (please specify key number/product)

Product details

745mm tall (When Raised).

1,070mm Below Ground.

Galvanised steel finish or Galvanised and Colour Coated (please specify BS/RAL Colour)

Installation & use

It is recommended that posts are placed no further than 1,200mm apart to ensure no vehicle may pass between the raised posts.

An excavated hole of approximately 1,200mm deep and 300mm diameter is required for installation. Provision for suitable drainage must be made (chippings or similar) at the bottom of the hole. The uppermost 3-400mm must be concrete.

The lid of the post should be no more than 10mm above finished ground level.

Keep the sliding post clean and occasionally lubricate the lock with Ambersil 40+ or similar.

This product is guaranteed for 12 months (if installed and used correctly).

Tel Sales : 02920 855756 - Fax : 02920 887005 - Email : Enquiries@procterContracts.co.uk