


Tubular Railings

PCD11

Our **Tubular railings** consists of a round or diamond shaped tubular infill, flat horizontal rails and RHS (rolled hollow section) posts, with sizes varying depending on height and usage. Styles can be either traditional or more contemporary, so the mix of applications can be considerable.

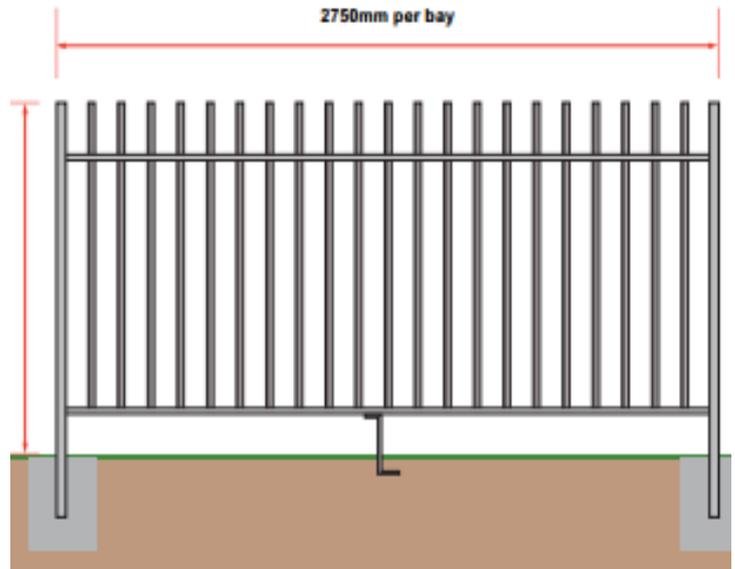

Available in heights from 1000mm to 3.0m, the railings are hot dip galvanised as standard plus we also offer a wide range of polyester powder coated finishes.

Applications

Schools
Perimeter Demarcation and security
Offices
Parks
Playgrounds
Residential



Product Data

Finish	Hot dip Galvanised to BS EN ISO 1461:2009 and polyester coated to a range of RAL colours			
Railings Height	Post Section	Top Rail	Bottom Rail	Bar Section
1.0m	50 x 50mm SHS	40 x 10mm	40 x 10mm	Infill - 21.3mm CHS
1.2m	50 x 50mm SHS	40 x 10mm	40 x 10mm	Infill - 21.3mm CHS
1.5m	50 x 50mm SHS	40 x 10mm	40 x 10mm	Infill - 26.9mm CHS
1.8m	60 x 60mm SHS	50 x 10mm	50 x 10mm	Infill - 26.9mm CHS
2.0m	60 x 60mm SHS	50 x 10mm	50 x 10mm	Infill - 26.9mm CHS
2.4m	80 x 80mm SHS	50 x 10mm	50 x 10mm	Infill - 26.9mm CHS
3m	80 x 80mm SHS	50 x 10mm	50 x 10mm	Infill - 26.9mm CHS



Contracts Offices: Garforth (W.Yorkshire) - Bedwas (S.Wales) - Brentwood (Essex)

T: 02920 855 756

E: enquiries@proctercontracts.co.uk

W: www.proctercontracts.co.uk