


Blunt Top Railings

PCD13

Our traditional solid bar blunt top railings are made to exceed the standards of BS 1722 pt9. The vertical bars can be made round, square bar face-forward, or square bar set at an angle of 45 degrees.

Matching Sliding Gates or Swing Gates can be supplied.

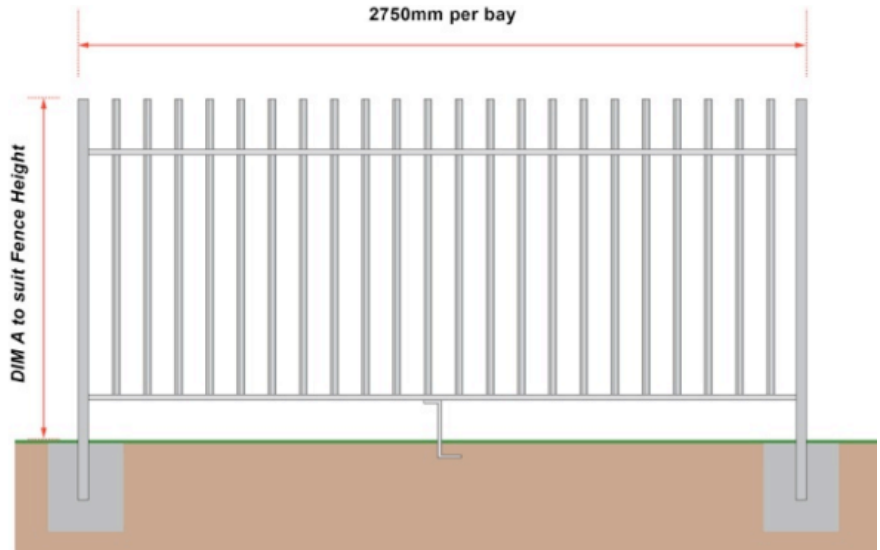

As standard, the railings and posts are galvanised but we also offer a wide range of polyester coated finishes. Height is typically from 450mm to 3m.

Applications

Schools
Perimeter
Offices
Parks
Playgrounds
Residential



Product Data

Finish	Hot dip Galvanised to BS EN ISO 1461:2009 and polyester coated to a range of RAL colours			
Railing Height	Post section	Top Rail	Bottom Rail	Bars
1.0m	50 x 50mm SHS	40 x 10mm	40 x 10mm	12mm
1.2m	50 x 50mm SHS	40 x 10mm	40 x 10mm	12mm
1.5m	50 x 50mm SHS	40 x 10mm	40 x 10mm	16mm
1.8m	60 x 60mm SHS	50 x 10mm	50 x 10mm	16mm
2.0m	60 x 60mm SHS	50 x 10mm	50 x 10mm	20mm
2.4m	80 x 80mm SHS	50 x 10mm	50 x 10mm	20mm
3.0m	80 x 80mm SHS	50 x 10mm	50 x 10mm	20mm



Contracts Offices: Garforth (W.Yorkshire) - Bedwas (S.Wales) - Brentwood (Essex)

T: 02920 855 756

E: enquiries@proctercontracts.co.uk

W: www.proctercontracts.co.uk